


- Architectural Window Films
- Commercial Window Films
- Residential Window Films
- Automobile Window Films
- Frosted Film
- Colour Sticker
- Computer Custom Cut Design












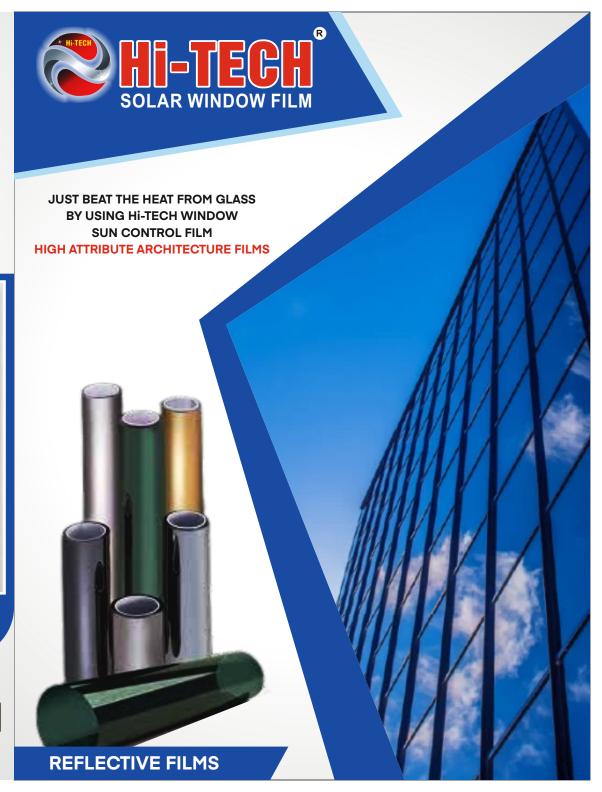








Thickness 2 mil Visible Light Transmission 13 % UV Rays Rejection 99 % Solar Energy Rejection 75 % Look for this logo on th film



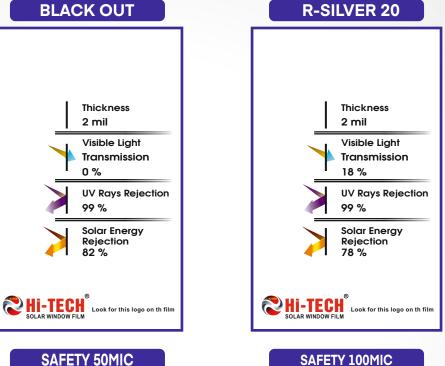





Note: Kindly ensure the water mark of SOLAR WINDOWN ELL logo while procuring.

Disclaimer: Tests are Representative of Actual Production & May Vary from Batch to Batch